


Product No: HPD028B Series

Features

- ▶ Input : ACDC9~24V
- ▶ 97% high efficiency at DC12V drives 3LEDs in series
- ▶ Output: 350mA/500mA/700mA/1A constant current
- ▶ Provide PWM control pin
- ▶ Easy to drive High Power LEDs

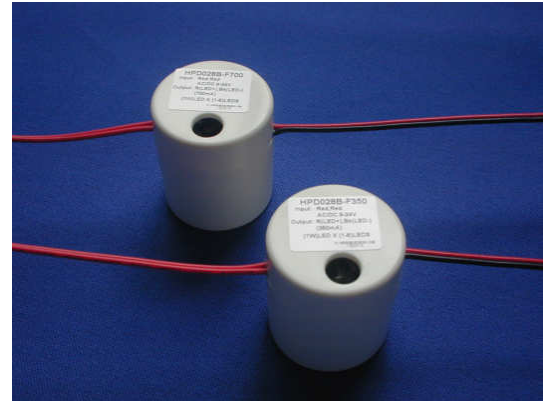

Dimensions:

31.0mm (D) x 35.0mm (H)

Electrical characteristics

Part No.	Input Condition	Output	Application(Number of LED)
HPD028B-F350	ACDC9~24V	3~24V/350mA	1Wattx(1~2)pcs@ACDC9V 1Wattx(1~3)pcs@ACDC12V 1Wattx(1~6)pcs@ACDC24V
HPD028B-F500	ACDC9~24V	3~24V/500mA	2Wattx(1~2)pcs@ACDC9V 2Wattx(1~3)pcs@ACDC12V 2Wattx(1~6)pcs@ACDC24V
HPD028B-F700	ACDC9~24V	3~24V/700mA	3Wattx(1~2)pcs@ACDC9V 3Wattx(1~3)pcs@ACDC12V 3Wattx(1~6)pcs@ACDC24V
HPD028B-F1000	ACDC9~24V	3~4V/1000mA	5Wattx1pcs@ACDC9V 5Wattx1pcs@ACDC12V 5Wattx1pcs@ACDC24V

*LED: CREE XR White LED in series

Configuration Arrays

Part No.: HPD028B

ACDC9~24V Input, drive up 1~6pcs High Power LEDs in series

